

AEM0070 Acoustic Digital Door Closer



The Acoustic Door closer learns the sound of your specific fire alarm, releasing the door in the event of a fire. The closer is also battery operated so it can easily be retrofitted to any door.

The AEM0070 door closer is ideally suited to environments such as care homes, schools and hospitals where it is essential to have doors in an open position at certain times of the day to aid access, but equally as important to ensure the doors are closed in the event of a fire.

Features & Benefits



- Digital Acoustic triggered door closer
- Learns the sound of your fire alarm
- Easy, wire free installation and programming
- Daily timed release option
- Holding Angle 65 – 105 degrees
- Requires 2 Alkaline C Cell batteries which last for 12 months
- The releasing trigger reacts to a particular sound rather than simply a loud noise, significantly reducing false activations
- Adjustable closing speeds
- Seven segment LED display
- Manual release button
- Low battery warning display
- Other finishes available as a special order

Certification


- CE marked
- Fire tested to EN1634-1 for 30 and 60min Timber Fire Doors
- EN1155 – Electrically powered hold open devices
- EN1154 – Controlled Door Closer Devices
- EMC Approved

AEM0070 Acoustic Digital Door Closer

Technical Information

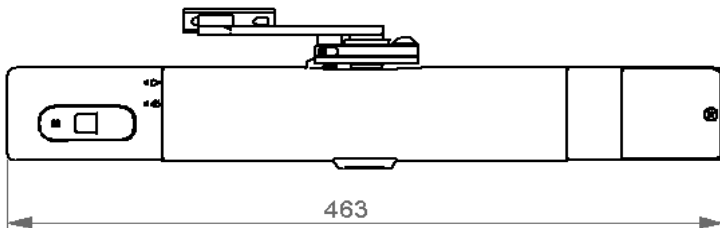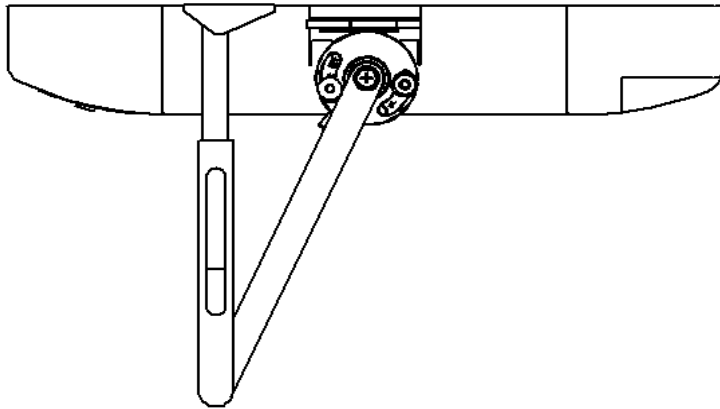

Code	Description
Hold Open type	Swing free
Power Size	4
Default setting	65dBA, 1.2 – 3.0 kHz
Preferred sounder	Continuous tone
Dimensions	L-463 x W-71 x D-76
Standard finish	Silver
Other available finishes	Stainless steel, polished steel or brass

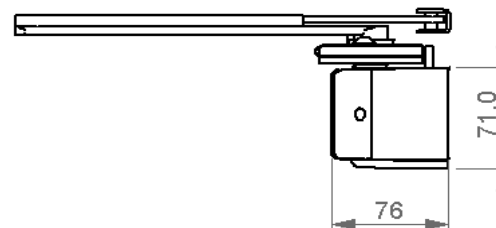

For further information contact:

Securefast plc
 Unit 6 & 7
 The Cedars Business Centre
 Avon Road, Cannock
 Staffordshire
 WS11 1QJ



Call > +44 (0) 1704 502801

Email > sales@securefast.co.uk

Visit > www.securefast.co.uk