

Deedlock Shear Magnet – AEMSF300

The AEMSF300 Shear Magnet offers a higher level of security, with a holding force up to 2000 lbs, achieved by a combination of magnetic holding force and interlocking pins.

Simple to install and suitable for single or double swing, single or pairs of doors. Fire tested to EN1634-1 for 30 minutes or 60 minutes timber fire doors.


Features & Benefits

- Mortice shear lock is fully concealed and can be fitted to timber or metal doors (with a minimum door thickness of 44mm)
- Holding force up to 2000 lbs / 8896N (dependant on installation details)
- Can be used horizontally in the transom or fitted vertically in the frame jamb
- Door and lock status monitoring
- CE marked
- Fixing kit available for glass door applications (AMS41SSM only)
- Black finish



Deedlock Shear Magnet – AEMSF300

Technical Data

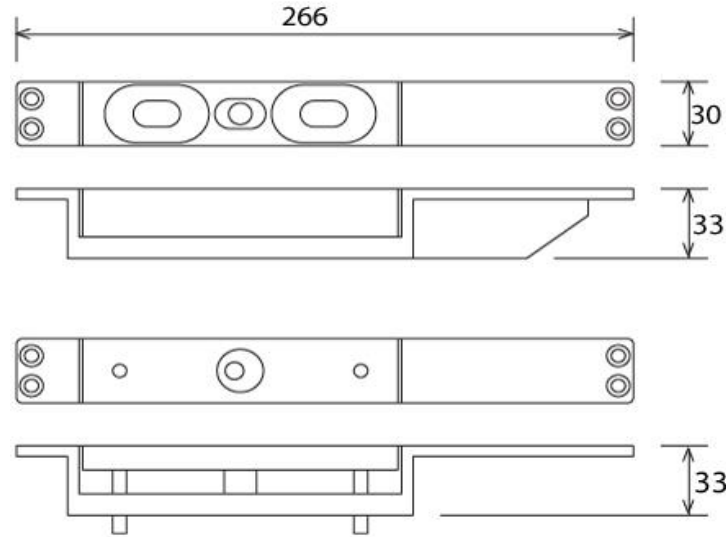

Features	
Holding Force	2000 lbs / 8896N
Security Level	High
Voltage	12-24v DC
Current A (12/24)	2.2/1.4
Finish	Zinc Plated
Operating Temp	-30°C to +50°C
Auto Relocking Timer	1-6 seconds adjustable
Fire tested to	EN1634-1

For further information contact:

Securefast plc
 Unit 6 & 7
 The Cedars Business Centre
 Avon Road, Cannock
 Staffordshire
 WS11 1QJ



Call > +44 (0) 1704 502801

Email > sales@securefast.co.uk

Visit > www.securefast.co.uk