

## ASL1100 SmartLock Locker Lock



SmartLock Locker Lock is ideal for:

- Spa/ Fitness centres
- Resorts
- Golf clubs
- Sauna
- Sport and gym centres
- Educational Facilities
- Online shopping collection points
- Hotel Cupboards

***The SmartLock Locker lock provides a high level of security and ease of operation for lockers using MIFARE™ proximity RFID instead of mechanical keys which require expensive management.***

The Locker lock provides a new level of security for both 'Free Use' and 'Assigned Use' lockers.


The lock has two locking modes "Manual" and "Automatic". The Manual modes requires the card to be re-presented to re-lock the locker, whilst the lock will re-lock after 4 seconds in the Automatic mode.

Convenient for both user and management, with the industry-leading technology, elegant design and fashionable locks, Smartlock locker lock is suitable for every style of locker room.

### Features & Benefits

- Locking/Unlocking of the locker lock is by simply offering the fob or card near to the reader
- RFID contactless operation
- Autonomous system - No need for cabling; standalone and battery operated
- Free use – The user can select any free locker, once occupied the locker can only be opened by that specific card. Even though the card is not locker specific, it can only be used in one locker at a time
- Assigned use – The user can be assigned the use of a specific locker by pre-programming the key to the locker lock
- Master keys – Available to create master cards to manage all lockers in property
- Tamper indicator – Buzzer will alarm for one minute if locks are being tampered with or not closed properly
- Occupied LED - Blue LED will blink to indicate occupation once locker has been locked (For share use mode)
- Uses four AA Batteries
- Can be operated by fobs, card or wrist band

### ASL1100 SmartLock Locker Lock

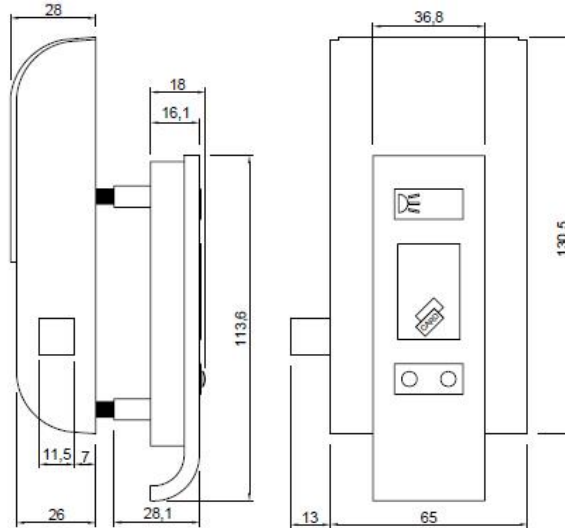

Product Codes	
ASL1100	Smartlock Locker Lock Unit
ASL954/FB	Encoded Fob
ASL954/RB	Encoded Wrist Band

Technical Specification	
Power Source	4 AA Batteries – 1.5V
Life Cycle	15,000 Cycles
RFID Frequency	13.56 MHz
Reading distance	10 to 25mm
Temperature range	- 20 / 55°C
Dimensions (H x W x D)	114 x 37 x 16mm
Installation thickness range	12 to 22mm
Colour option	Silver
Weight	200g

For further information contact:

**Securefast plc**  
 6, The Cedars Business Centre  
 Avon Road, Cannock  
 Staffordshire  
 WS11 1QJ



**Call** > +44 (0) 1704 502 801

**Email** > sales@securefast.co.uk

**Visit** > www.securefast.co.uk