

## ASV711 Two-wire Colour Video Entry System



***The ASV711 Genway Two-wire Video Entry System has a 7" colour flat screen monitor with buttons for speech and lock release.***

The kit also includes a robust compact door station for the outside and a power transformer. The modern appearance makes the kit ideal for one-way entry which compliments any interior.

The robust door station is ideal for fitting in a porch area or under a canopy to protect the unit from direct rainwater.

The monitor and door station can be fitted up to 100m apart, however to improve the reception quality it is recommended to include an 8-core alarm cable.

An additional PSU is required for the Power to Lock or Fail Safe locking devices, such as Electro-Magnets.

An additional PSU is required if a 12v dc Electric Release is to be used.


The Kit includes a Robust door station, an Internal monitor with a 7" TFT screen, a monitor mounting plate, connections and fixings and a power transformer and a user manual.

### Features & Benefits

- Surface mounted 7" colour monitor.
- Two-wire connection.
- Hands-free monitor.
- Monitor has buttons for lock release, picture recall, talk and mute.
- Monitor has indicators for power, busy and mute.
- Adjustments can be made on the monitor for volume, picture brightness and contrast.
- Double ring tone.
- Wall mounting plate for monitor to conceal fixings.
- Single call button and address window on door station.
- Surface mounted robust and compact door station.
- Small camera lens and white light LED's on door station.
- Power to Unlock or Fail Secure locking devices such as Electric Releases can be connected direct to the door station. (see options available)
- Screen resolution of 480 x 324
- Camera on Door Station Colour CD, PAL system, visible angle of 90° and light source White light LED
- Minimum Illumination of 0.1 Lux

### ASV711 Two-wire Colour Video Entry System

#### Technical Information

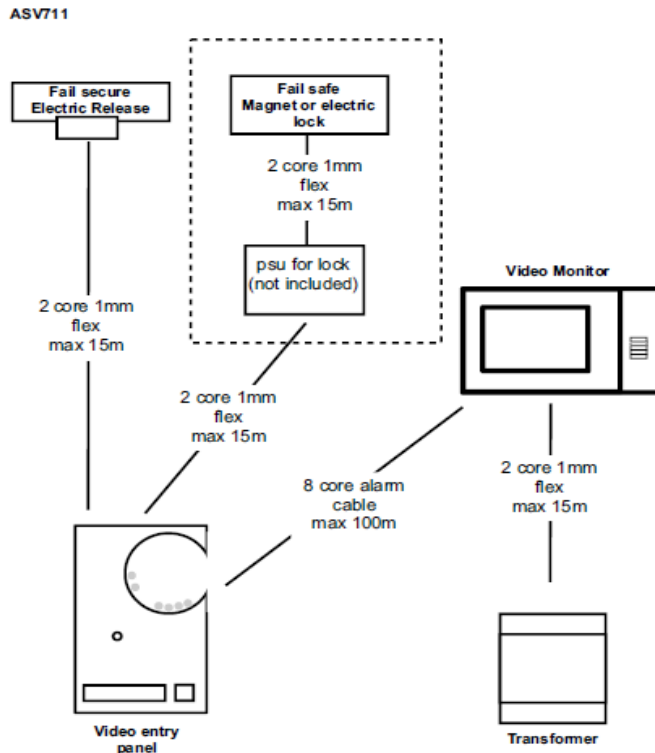

#### Electric Release options for use with ASV711 (24v) Fail Secure option when not using an additional PSU.

- ADCN424G Dorcas Mortice Electric Release 24v DC Fail Locked
- ADCN50N400-PX Dorcas Mortice Electric Release
- 12 – 24v DC Fail Locked 8000N Holding Force
- AL151 Alpro Rim Electric Release 12 – 24v DC Fail Unlocked

ASV711	Monitor	Door Station
Dimension (mm)	H208 x W220 x D46	H135 x W58 x D48
Weight (Kg)	0.7	0.5
Finish	Black	Grey
Material	Various	Zinc die cast alloy
Operating Voltage	24v DC	14 – 18v DC
Operating Current	500mA	300mA
Standby Current	100mA	30mA
Temperature	-10°C to +55°C	-10°C to +70°C
Humidity	10% to 95%	10% to 95%

For further information contact:

Securefast plc  
 Unit 6 & 7  
 The Cedars Business Centre  
 Avon Road, Cannock  
 Staffordshire  
 WS11 1QJ



Call > +44 (0) 1704 502801

Email > sales@securefast.co.uk

Visit > www.securefast.co.uk